



Portable Box

Easy Operation

- Portable, plug and play
- Curve design, easy to roll

Friendly Interface


- Simple HMI with LED indicators
- Charging status identification

Robust Structure

- Anti-corrosion and weather proof
- High protection grade up to IP65

Secure and Safe

- Leakage current protection
- Over temperature protection

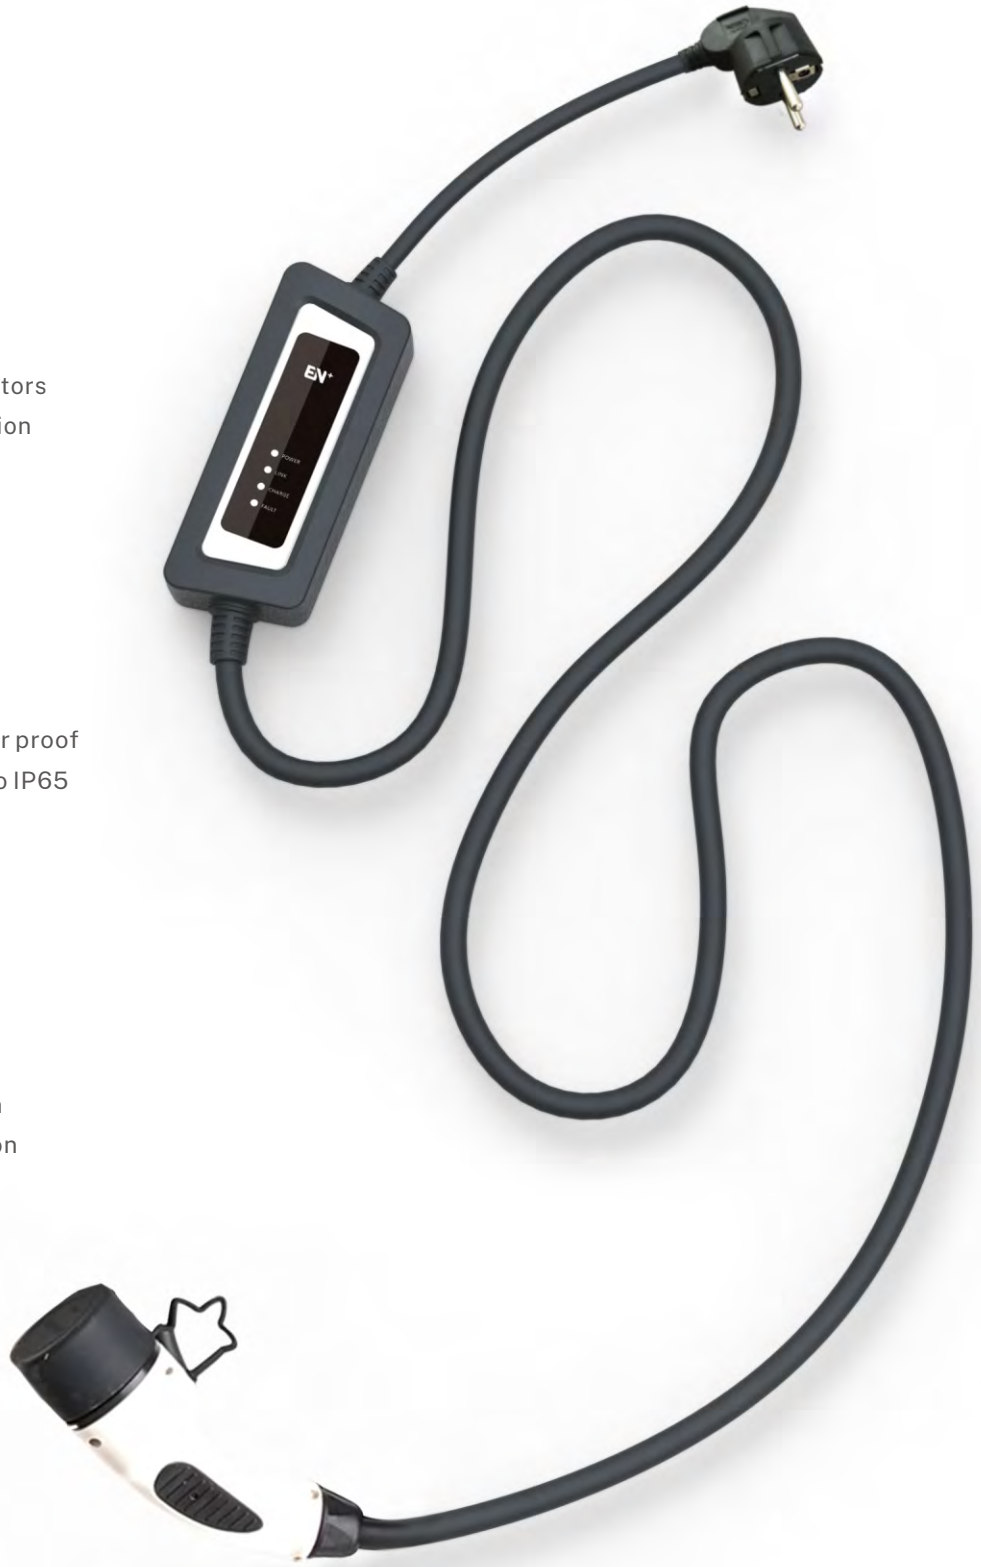

Portable Box

| Datasheet | Model | AC3500-DE-00 |
|----------------|------------------------|--|
| Input | Power Supply | 1P+N+PE |
| | Rated Voltage | 230V AC |
| | Rated Current | 13A |
| | Frequency | 50/60Hz |
| Output | Output Voltage | 230V AC |
| | Maximum Current | 13A |
| | Rated Power | 3kW |
| User Interface | Power Cord Plug | Schuko |
| | Charge Connector | Type 2 cable |
| | Cable Length | 4m |
| | Enclosure | Plastic PC940 |
| | LED Indicator | Green/Yellow/Red |
| | LCD Display | No |
| | Start Mode | Plug&Play |
| Safety | Ingress Protection | IP65 |
| | Impact Protection | IK10 |
| | Electrical Protection | Over current protection, Residual current protection, Ground protection, Surge protection, Over/Under voltage protection, Over/Under frequency protection, Over/Under temperature protection |
| | Certification | CE |
| | Certification Standard | EN/IEC 61851-1: 2017, EN/IEC 61851-21-2: 2018 |
| | Warranty | 2 years |
| Environment | Work Temperature | -30°C~+50°C |
| | Work Humidity | 5%~95% |
| | Work Altitude | <2000m |
| Package | Product Dimension | 195*74*47mm (H*W*D) |
| | Package Dimension | 360*295*155mm (L*W*H) |
| | Net Weight | 0.5kg |
| | Gross Weight | 1.2kg |
| | External Package | Handbag/Carton |

