


# Cubo Series AC Charger

Cubo Series AC Charger offers simultaneous dual charging. With high-output capability and flexible modes, it achieves extensive compatibility. Its sleek design is customizable, allowing for personalized branding. Advanced safety features ensure secure charging in any environment.

EU Standard

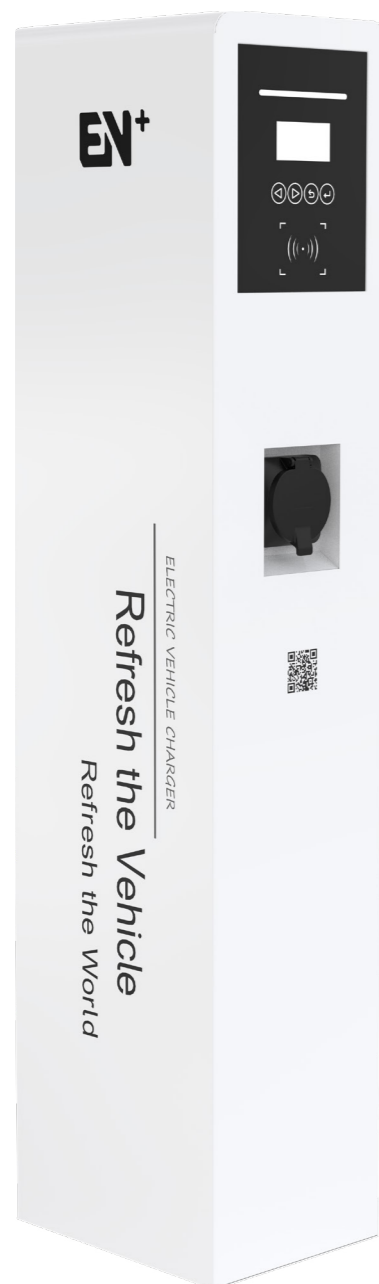

## Minimalistic

- Compact, slimline enclosure
- Built-in socket holder
- Easy installation

## Flexible

- Type 2 cable
- Floor-stand installation
- App operation / RFID authentication / Plug to Charge

## Intelligent

- Communications:  
Wi-Fi+4G+Bluetooth / Wi-Fi+Ethernet+Bluetooth
- Smart mobile App control
- Scheduled charging- for low tariffs
- OCPP 1.6 Json
- Dynamic load balancing

## Secure & Safe

- 30mA Type A + 6mA DC
- Independent RCBO
- MID certified energy meter with accurate measurement

CE CB

# Cubo Series AC Charger

Datasheet	Model	AC014K-BE-34	AC044K-BE-34
Electrical Specification	Power Supply	1P+N+PE	3P+N+PE
	Rated Voltage	230V AC	400V AC
	Rated Current	2X32A	2X32A
	Frequency	50 / 60Hz	
	Rated Power	2x7kW	2x22kW
Basic Attributes	Charge Connector	2xType 2 Socket (2xType 2 Cable Optional)	
	Enclosure	Galvanized Steel+Temper Glass	
	Installation	Floor Stand	
Interactive Interface	LED Indicator	Green / Yellow / Red	
	LCD Display	2.7" Monochrome Screen	
	RFID Reader	Mifare ISO / IEC 14443A	
	Start Mode	Plug to Charge / RFID Card/App	
Communication	Wi-Fi & Bluetooth & Ethernet	Yes	
	Wi-Fi & Bluetooth & 4G	Yes	
	OCPP	OCPP 1.6 Json	
Safety	RCD	30mA Type A + 6mA DC	
	RCBO	Type A	
	Energy Meter	MID Certified	
	Ingress Protection	IP54	
	Impact Protection	IK08	
	Electrical Protection	Over current protection, Residual current protection, Short circuit protection, Surge protection, Over / Under voltage protection, Over / Under frequency protection, Over temperature protection	
	Certification	CE / CB	
	Certification Standard	EN IEC 61851-1:2019 IEC61851-1:2017 IEC61851-21-2:2021	
	Warranty	2 Years	
	Working Environment	Operation Temperature	-30°C - +50°C
Work Humidity		5%-95%	
Work Altitude		≤2000m	
Package	Product Dimension	1200*290*230mm (H*W*D)	
	Package Dimension	1318*434*357mm (L*W*H)	
	Net Weight	29kg	28kg
	Gross Weight	49kg	45kg
	External Package	Wood Case	