


Cubo Series AC Charger

Cubo Series AC Charger offers simultaneous dual charging. With high-output capability and flexible modes, it achieves extensive compatibility. Its sleek design is customizable, allowing for personalized branding. Advanced safety features ensure secure charging in any environment.

EU Standard

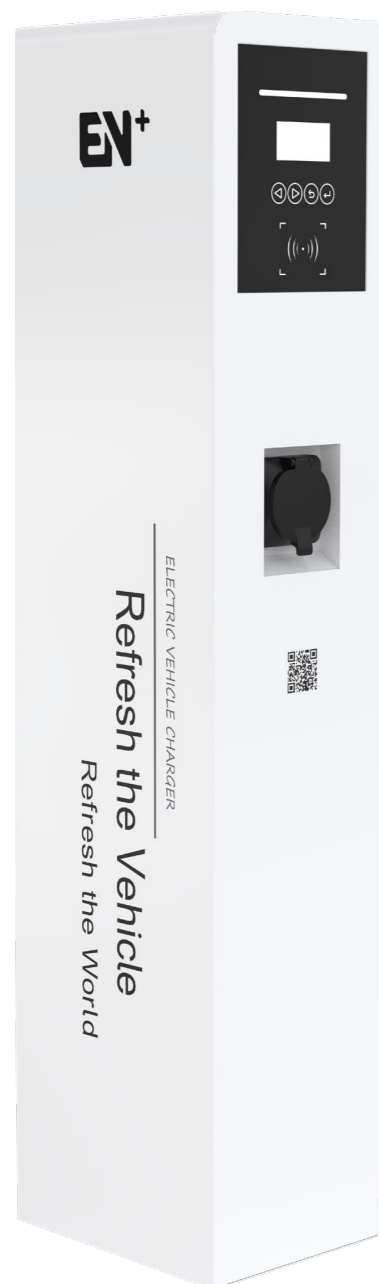

Minimalistic

- Compact, slimline enclosure
- Built-in socket holder
- Easy installation

Flexible

- Type 2 cable
- Wall-mount/Floor-stand installation
- App operation/RFID authentication/Plug to play

Intelligent

- Communications: Wi-Fi+4G+Bluetooth/Wi-Fi+Ethernet+Bluetooth
- Smart mobile App control
- Scheduled charging- for low tariffs
- OCPP 1.6 Json
- Dynamic load balancing

Secure & Safe

- 30mA AC + 6mA DC
- Independent RCBO
- MID certified energy meter with accurate measurement



Cubo Series AC Charger

Datasheet	Model	AC014K-BE-34	AC044K-BE-34
Electrical Specification	Power Supply	1P+N+PE	3P+N+PE
	Rated Voltage	230V AC	400V AC
	Rated Current	2X32A	2X32A
	Frequency	50/60Hz	
	Rated Power	2x7kW	2x22kW
Basic Attributes	Charge Connector	2xType 2 Socket (2xType 2 Cable Optional)	
	Enclosure	Galvanized Steel+Temper Glass	
	Installation	Pole-mount	
Interactive Interface	LED Indicator	Green/Yellow/Red	
	LCD Display	2.7"Black & White	
	RFID Reader	Mifare ISO/IEC 14443A	
	Start Mode	Plug to play/RFID Card/App	
Communication	Wi-Fi & Bluetooth & Ethernet	Yes	
	Wi-Fi & Bluetooth & 4G	Yes	
	OCPP	OCPP 1.6 Json	
Safety	RCD	30mA AC + 6mA DC	
	RCBO	Type A	
	Energy Meter	MID Certified	
	Ingress Protection	IP54	
	Impact Protection	IK08	
	Electrical Protection	Over current protection, Residual current protection, Short circuit protection, Surge protection, Over/Under voltage protection, Over/Under frequency protection, Over temperature protection	
	Certification	CE/CB	
	Certification Standard	EN IEC 61851-1:2019 IEC61851-1:2017 IEC61851-21-2:2021	
	Warranty	2 Years	
	Working Environment	Operation Temperature	-30°C - +50°C
Work Humidity		5%-95%	
Work Altitude		≤2000m	
Package	Product Dimension	1200*290*230mm (H*W*D)	
	Package Dimension	1318*434*357mm (L*W*H)	
	Net Weight	28.5kg	27.5kg
	Gross Weight	48.5kg	45.0kg
	External Package	Wood Case	